




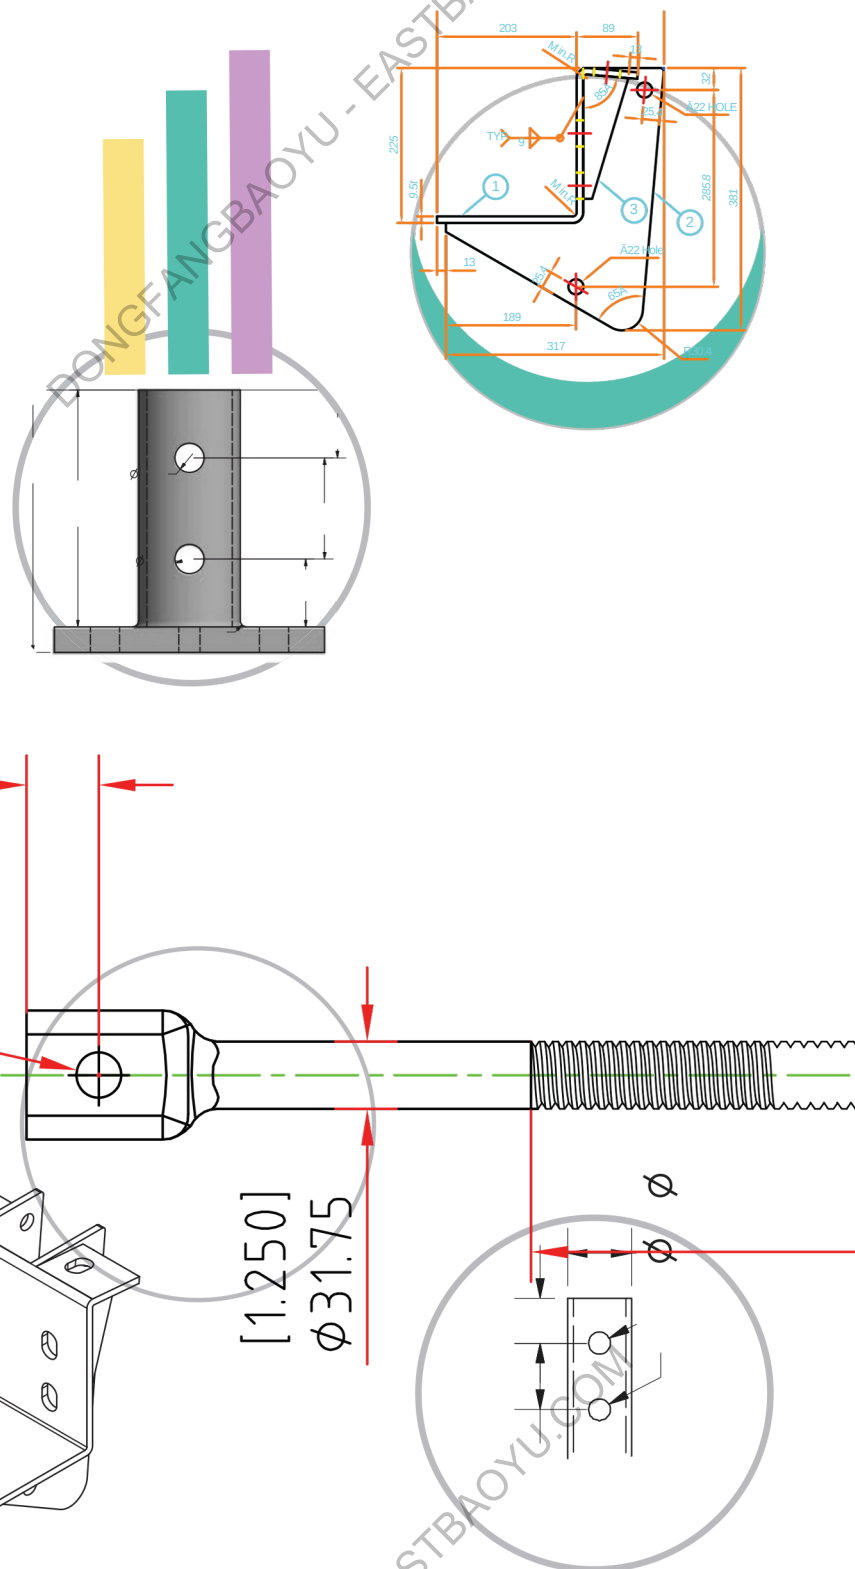

EASTBAOYU

NEW ENERGY

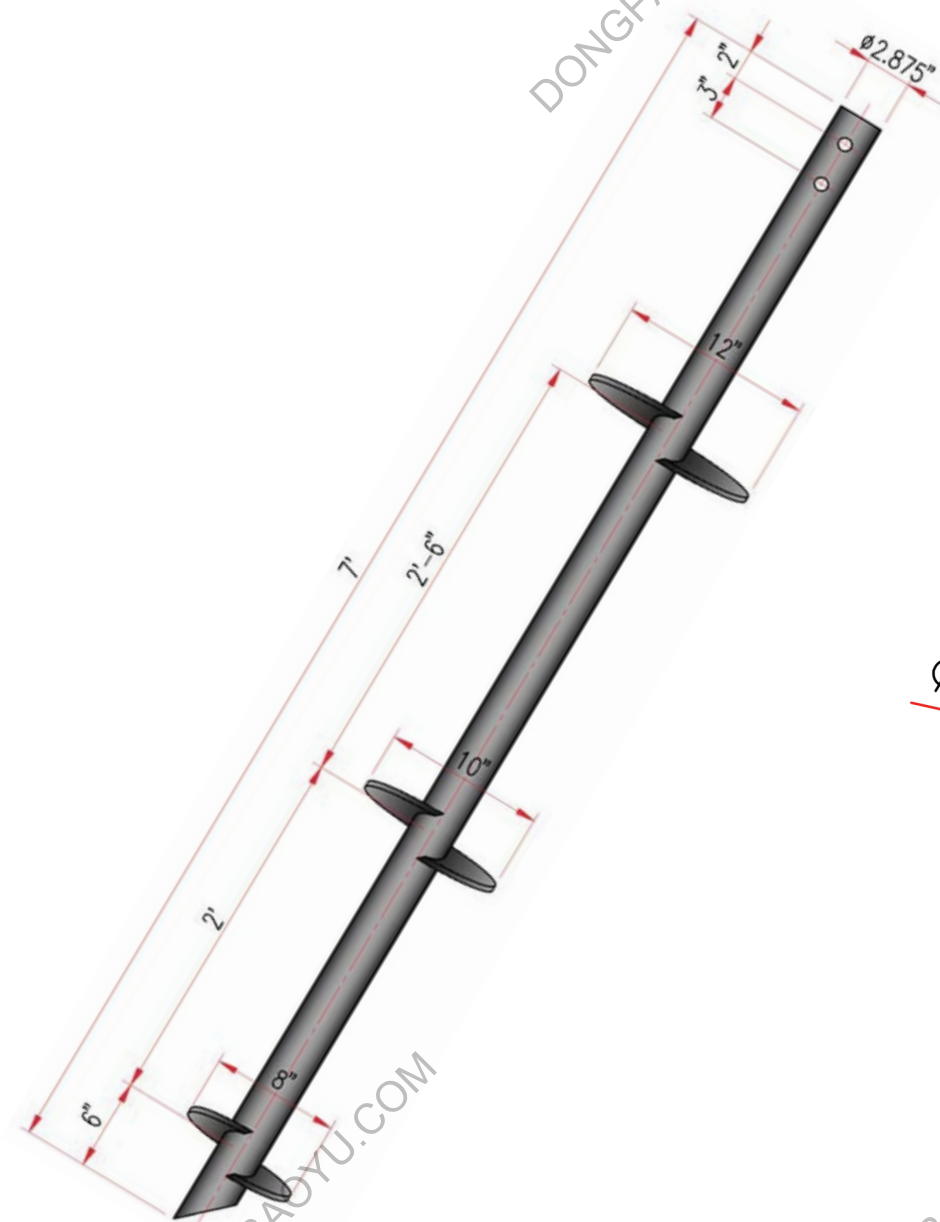

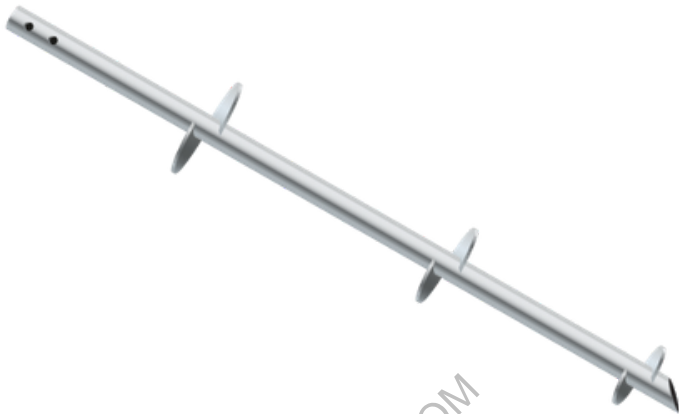

Helical Lead Flight-Round Pipe

Shaft Materials	API 5CT J55 ERW Pipe. 2-7/8" x .217"
Helix	ASTM A36(Q235B) Hot Rolled Plate Steel 3/8" and 1/2" Helix blade geometry in accordance with ICC-ES AC 358. Helix advancement ratio 3: 1 inches unless otherwise specified
Helix Plate Weldment	Fillet Weld to shaft 100% penetration on both side helix Weldment as per AWS D1.1
Coupling Bolts	ASTM A325 Bolts with Nuts. 5" x 0.75" Dia bolt with heavy duty nut Hot Dipped Zinc
Corrosion Protection	Galvanization as per ASTM A153 standard
Surface	Plain, Painted, Anti Rust Oil are available upon your request
Notes	OEM service is available, different materials and specifications can be customized according to your demand





DRIVECAST Lead Flight

Shaft Materials	Q355B(ASTM A500 Gr-B)
In case of Coupler Pipe	API 5CT J55 Seamless Pipe. 2-3/8" x.276"
Coupler Pipe Weldment	Fillet Weld to shaft 100% penetration on both side helix Weldment as per AWS D1.1
Coupling Bolts	ASTM A325 Bolts with Nuts. 5" x 0.75" Dia bolt with heavy duty nut
Corrosion Protection	Hot Dipped Zinc Galvanization as per ASTM A153 standard
Surface	Plain, Painted, Anti Rust Oil are available upon your request
Notes	OEM service is available, different materials and specifications can be customized according to your demand

Helical Lead Flight-Square Bar


Shaft Materials	40Cr, 8mm Radius Square Bar Cold Drawn. 1.5" - 1.5"
Helix	ASTM A36(Q235B) Hot Rolled Plate Steel 3/8" and 1/2" Helix blade geometry in accordance with ICC-ES AC 358.
Helix Plate Weldment	Helix advancement ratio 3: 1 inches unless otherwise specified Fillet Weld to shaft 100% penetration on both side helix Weldment as per AWS D1.1
Coupling Bolts	ASTM A325 Bolts with Nuts. 5" - 0.75" Dia bolt with heavy duty nut
Corrosion Protection	Hot Dipped Zinc Galvanization as per ASTM A153 standard
Surface	Plain, Painted, Anti Rust Oil are available upon your request
Notes	OEM service is available, different materials and specifications can be customized according to your demand

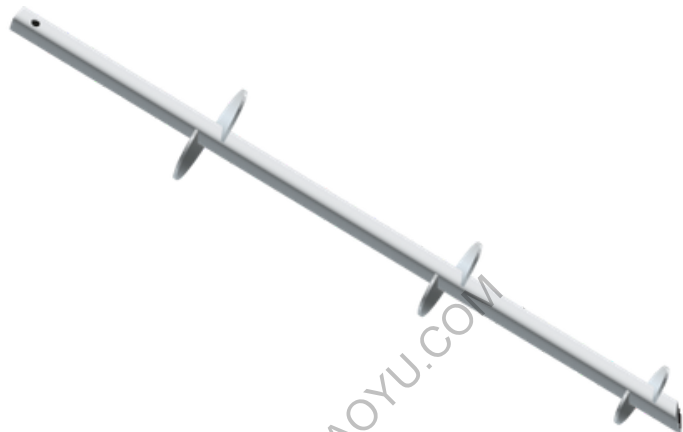

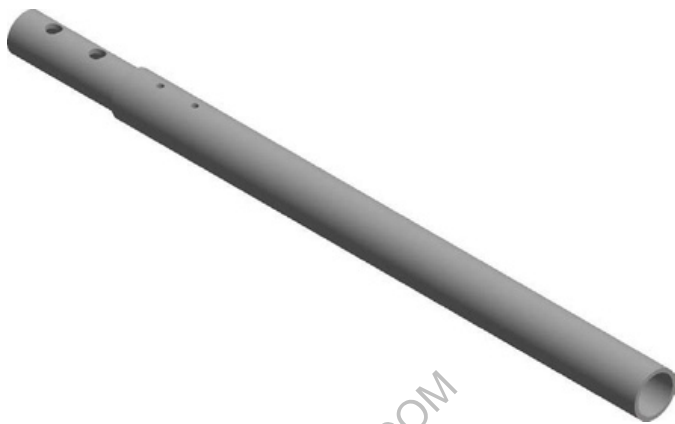


Extension-Round Pipe

Shaft Materials	API 5CT J55 ERW Pipe. 2-7/8" x .217"
Insert Pipe	API 5CT J55 Seamless Pipe. 2-3/8" x.276"
Insert Pipe Weldment	Fillet Weld to shaft 100% penetration on both side helix Weldment as per
Coupling Bolts	AWS D1.1 ASTM A325 Bolts with Nuts. 5" x 0.75" Dia bolt with heavy duty nut
Corrosion Protection	Hot Dipped Zinc Galvanization as per ASTM A153 standard
Surface	Plain, Painted, Anti Rust Oil are available upon your request
Notes	OEM service is available, different materials and specifications can be customized according to your demand

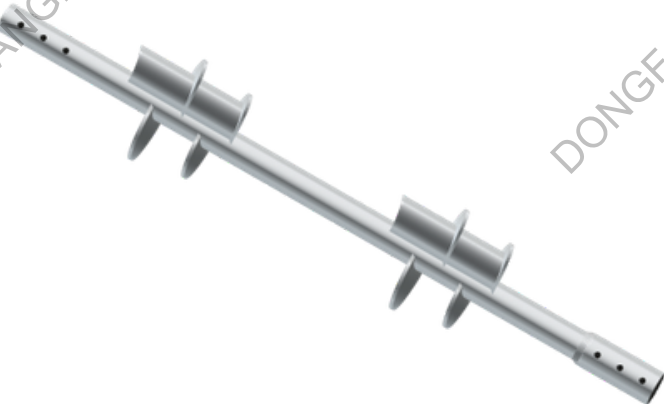


DRIVECAST Extension

Shaft Materials	Q355B(ASTM A500 Gr-B)
In case of Coupler Pipe	API 5CT J55 Seamless Pipe. 2-3/8" x.276"
Coupler Pipe Weldment	Fillet Weld to shaft 100% penetration on both side helix Weldment as per AWS D1.1
Coupling Bolts	ASTM A325 Bolts with Nuts. 5" x 0.75" Dia bolt with heavy duty nut
Corrosion Protection	Hot Dipped Zinc Galvanization as per ASTM A153 standard
Surface	Plain, Painted, Anti Rust Oil are available upon your request
Notes	OEM service is available, different materials and specifications can be customized according to your demand

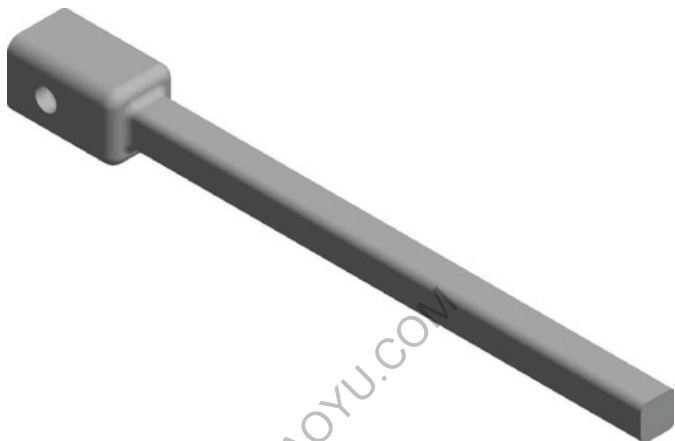

Extension-Integral Forged Square Bar

Shaft Materials	API 5CT J55 ERW Pipe. 2-7/8" x .217"
In case of Coupler Pipe	API 5CT J55 Seamless Pipe. 2-3/8" x.276"
Coupler Pipe Weldment	Fillet Weld to shaft 100% penetration on both side helix Weldment as per AWS D1.1
Coupling Bolts	ASTM A325 Bolts with Nuts. 5" x 0.75" Dia bolt with heavy duty nut
Corrosion Protection	Hot Dipped Zinc Galvanization as per ASTM A153 standard
Surface	Plain, Painted, Anti Rust Oil are available upon your request
Notes	OEM service is available, different materials and specifications can be customized according to your demand

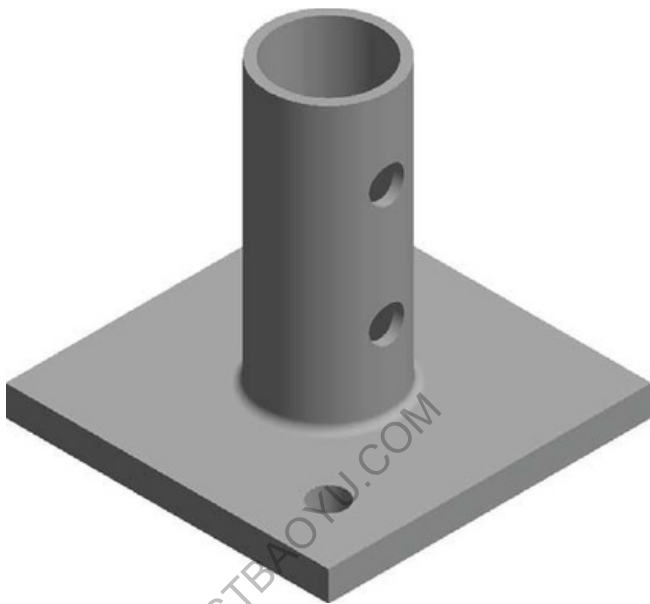

Construction Cap

Top Plate	ASTM A36 Hot Rolled Plate 3/4" Thickness. Tensile Strength: 58ksi. Yield Strength: 36ksi Size: 8" x 8" and 12" x 12"
Pipe Materials	ASTM A36 Round Pipe 3.5" x .254" x 7".
Weldment	Fillet Weld to shaft 100% penetration on both side helix Weldment as per AWS D1.1
Coupling Bolts	ASTM A325 Bolts with Nuts. 5" x 0.75" Dia bolt with heavy duty nut
Corrosion Protection	Hot Dipped Zinc Galvanization as per ASTM A153 standard
Surface	Plain, Painted, Anti Rust Oil are available upon your request
Notes	OEM service is available, different materials and specifications can be customized according to your demand




2-7/8" Pile Bracket w/T-bar and Threaded Rod with Hardware

Shaft Materials	ASTM A36 Hot Rolled Plate 3/8" Thickness. Tensile Strength: 58ksi. Yield Strength : 36ksi
T-Bar Materials	ASTM A36(Q235B). 2.5" x 2.5" x .25" Square Pipe and 2.25" x.125" x 2' Round Pipe.
Threaded Rod	0.875" x 14" long all thread rod, Grade G8 Tensile strength=115ksi(min) Electro zinc plated per ASTM B633
Weldment	Fillet Weld to shaft 100% penetration on both side helix Weldment as per AWS D1.1
Coupling Bolts	ASTM A325 Bolts with Nuts. 5" x 0.75" Dia bolt with heavy duty nut
Corrosion Protection	Hot Dipped Zinc Galvanization as per ASTM A153 standard
Surface	Plain, Painted, Anti Rust Oil are available upon your request
Notes	OEM service is available, different materials and specifications can be customized according to your demand



Tieback Anchor System

Shaft Materials	40Cr Round Rod 1-1/4" x 2' & 3' Length
Square Socket	Integral full body by hot forging.
Thread Length	18" on 2' and 26" on 3'.
Bevelled Washer	ASTM A36(Q235B) Steel Plate. 10" x 10" and 12" x 12".
Coupling Bolts	ASTM A325 Bolts with Nuts. 5" x 0.75" Dia bolt with heavy duty nut
Nuts	Heavy duty nut confirms to ASTM A563 Grade DH
Corrosion Protection	Hot Dipped Zinc Galvanization as per ASTM A153 standard
Surface	Plain, Painted, Anti Rust Oil are available upon your request
Notes	OEM service is available, different materials and specifications can be customized according to your demand

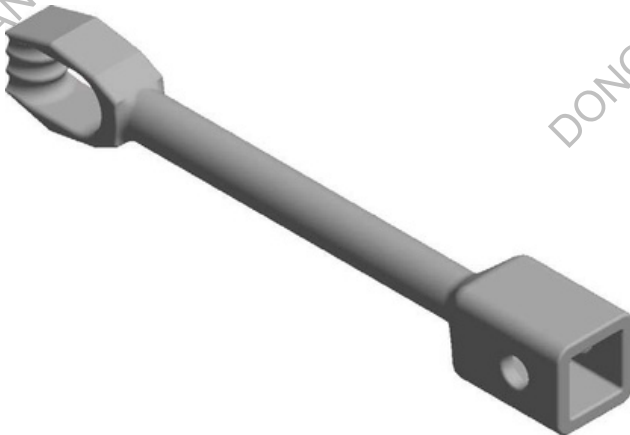


Guy Wire Adapter

Shaft Materials	40Cr 1-1/4" Round Rod 18" Length
Square Socket and Tripleye	Integral full body by hot forging
Corrosion Protection	Hot Dipped Zinc Galvanization as per ASTM A153 standard
Surface	Plain, Painted, Anti Rust Oil are available upon your request
Notes	OEM service is available, different materials and specifications can be customized according to your demand



No Wrench Screw Anchor

Shaft Materials	40Cr, 0.75" Round Rod 66" Length with 6" Single Helix.
Plate Materials	ASTM A36(Q235B) Hot Rolled Plate 3/8" Thickness.
Tripleye	Integral full body by forging
Corrosion Protection	Hot Dipped Zinc Galvanization as per ASTM A153 standard
Surface	Plain, Painted, Anti Rust Oil are available upon your request
Notes	OEM service is available, different materials and specifications can be customized according to your demand

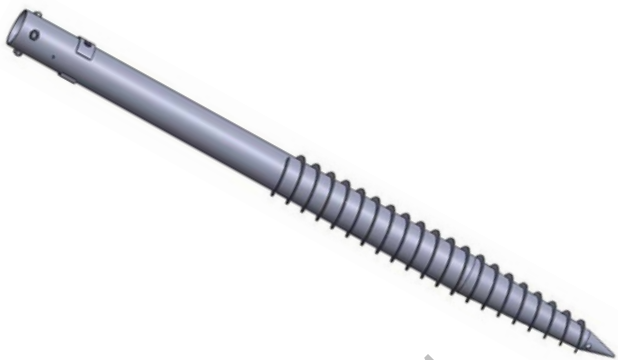

Ground Screw Anchor 1

Size(mm)	Galvanize	Thick(mm)	Specifican	Materials
76/60 x 1600	75-100um	3.0-4.0mm	3 x M12 3	Q235B/Q355B
76/60 x 1800	75-100um	3.0-4.0mm	x M12 3 x	Q235B/Q355B
76/60 x 2000	75-100um	3.0-4.0mm	M12	Q235B/Q355B




Ground Screw Anchor 2

Size(mm)	Galvanize	Thick(mm)	Specifican	Materials
76/60 x 1600	75-100um	3.0-4.0mm	3 x M12 3	Q235B/Q355B
76/60 x 1800	75-100um	3.0-4.0mm	x M12 3 x	Q235B/Q355B
76/60 x 2000	75-100um	3.0-4.0mm	M12	Q235B/Q355B



Ground Screw Anchor 3

Size(mm)	Galvanize	Thick(mm)	Specifican	Materials
76/60 x 1600	75-100um	3.0-4.0mm	3 x M12 3	Q235B/Q355B
76/60 x 1800	75-100um	3.0-4.0mm	x M12 3 x	Q235B/Q355B
76/60 x 2000	75-100um	3.0-4.0mm	M12	Q235B/Q355B

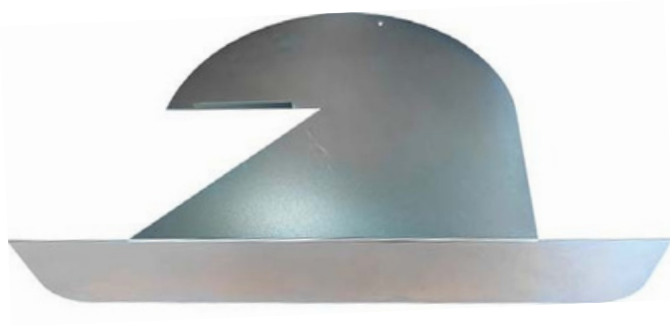

Ventilation Gooseneck

Steel Materials	ASTM A653, 0.8mm
Steel Mesh	ASTM A36
Baffle	Aluminum 201, 0.3mm
Weldment	Laser Weld
Surface	Zinc Galvanize
Size	4", 6" and 10"



Rectangular Air Duct



Blast Gate Sliding Damper



Chimney Caps



Compression Coupling Clamp



Air Dampers



Air Duct Joint Y Tee Fitting



Transition Coupler

Steel Materials	Casting Iron QT450-10
Process	Sand Casting
Surface	Hot Dip Zlnc Galvanization
Size	To Fit with 2 and 3 Holes Round Pipe and 1 Hole Square Bar Extension Customized size available



Mooring Head Tube Type

Steel Materials	Q355B(ASTM A500 Gr-B)
Surface	Hot Dip Zlnc Galvanization
Size	To fit with 1.5" - 2.5" Square Bar Extension Customized size available



Mooring Head Forged Type

Steel Materials	Q355B(ASTM A500 Gr-B) on Plate / 40Cr on Adapter
Surface	Hot Dip Zlnc Galvanization
Size	To fit with 1.5" - 2.5" Square Bar Extension Customized size available



Angle Bracket



Plate Bracket



Crawl Space Bracket



Push Pin



Cap + 4 studs



Rock Anchor



Jack Screw F Type



Guide Sleeve



Starter Pin



Grouting Case



Hollow Bar





Shackle



PRODUCT DISPLAY




www.eastbaoyu.com

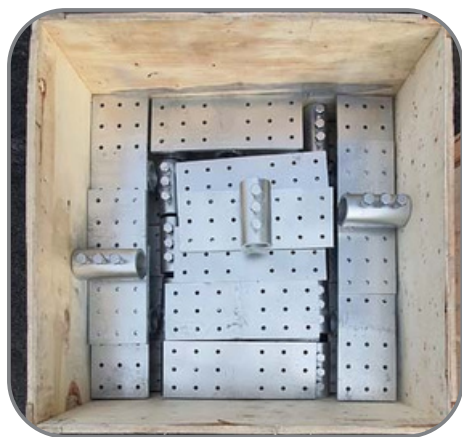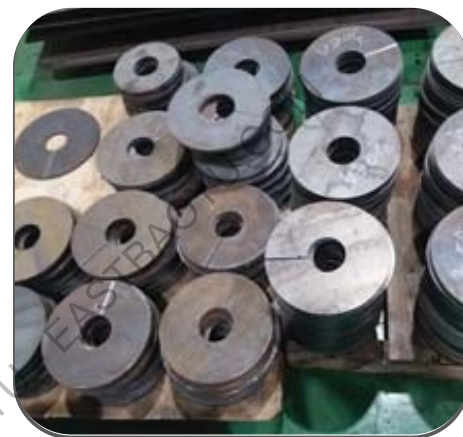



FACTORY

www.eastbaoyu.com

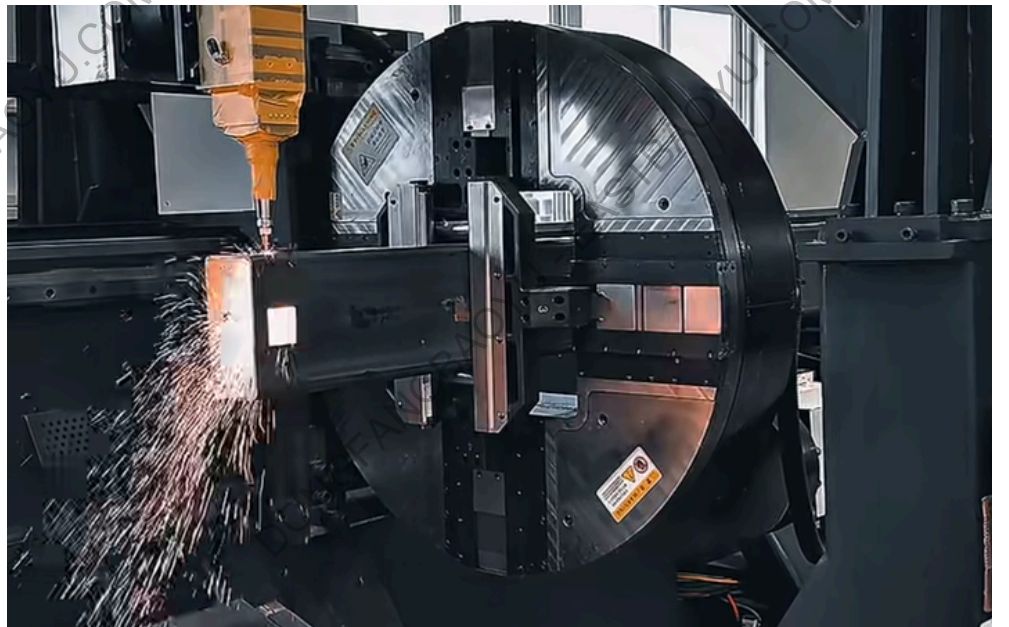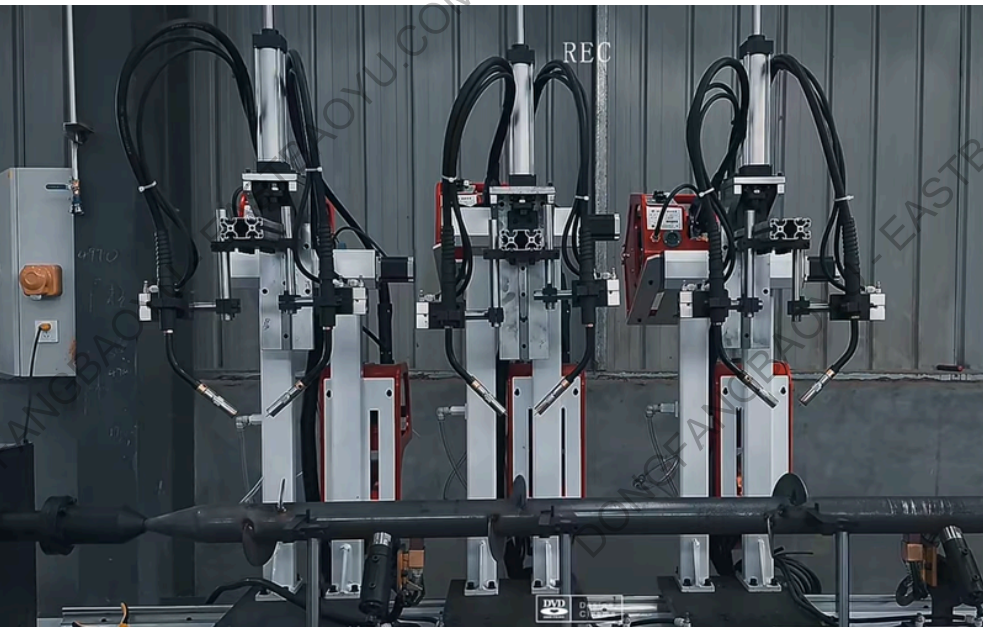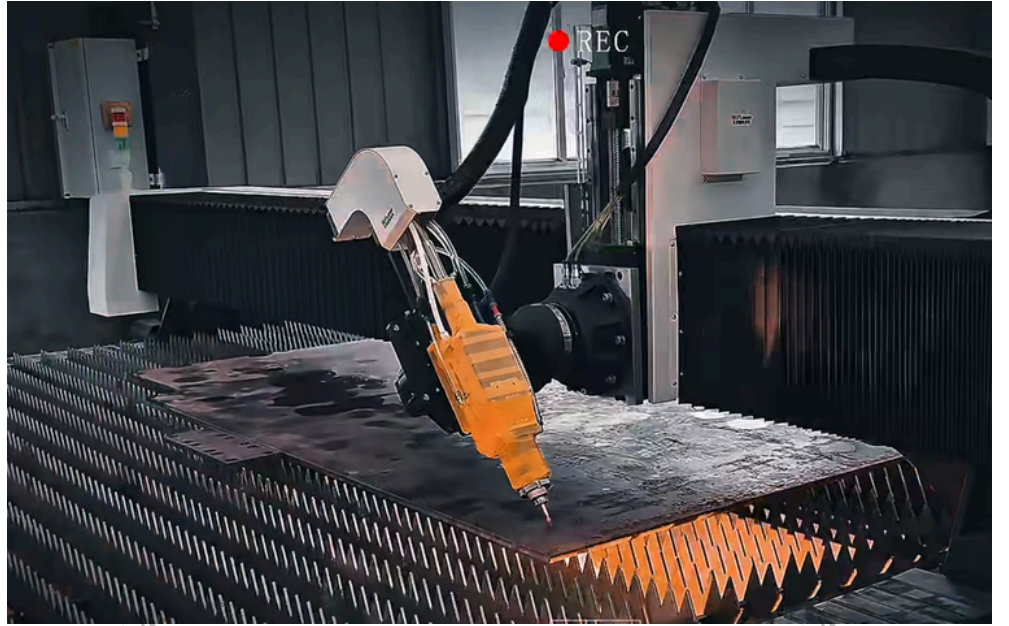



PACKING & SHIPMENT

www.eastbaoyu.com

